

Replacement Cords & Thermostats

Heat Shield

HS1



Use when exhaust manifold or turbo come close to heater termination.

TwinStat™ Thermocord

HOTSTART's TwinStat™ Thermocord is an energy efficient, idle reduction heater cord ideal for fleet operations. The cord's twin thermostats monitor engine temp and ambient temp, allowing for heating to happen only when needed. Contact HOTSTART customer service to select the best heater cord for your fleet.



NOTE: When ordering in-block heater **and** thermocord, place suffix **-WOC** (which stands for **without cord**) after the heater model number to save cost as the standard 6' (1.8m) heater cord is replaced by the Thermocord harness.

For use with In-block Heaters

Cord Length	Plug Style	120 Volt	240 Volt
6' 1.8m	1	IM6-1IN	IM6-2IN
11' 3.4m	1	IM11-1IN	IM11-2IN
16' 4.8m	1	IM16-1IN	IM16-2IN
Cord Length	Plug Style	120 Volt	240 Volt
6' 1.8m	2	11PR72T	21PR72T
11' 3.4m	2	11PR132T	21PR132T
16' 4.8m	2	11PR192T	21PR192T

STYLE 1




15amp, 120V




15amp, 240V

Fits most competitor's applications.

STYLE 2



15amp, 120V




15amp, 240V



Thermocord for In-block Heaters

Part No.	Volts	Thread Size	Temp Range
TC031310-866	120	1/2"	100°-120°F (38°-49°C)
TC031312-866	120	1/2"	120°-140°F (49°-60°C)
TC032310-866	240	1/2"	100°-120°F (38°-49°C)
TC032312-866	240	1/2"	120°-140°F (49°-60°C)
TC031308-866	120	1/2"	80°-100°F (27°-38°C)
TC032308-866	240	1/2"	80°-100°F (27°-38°C)

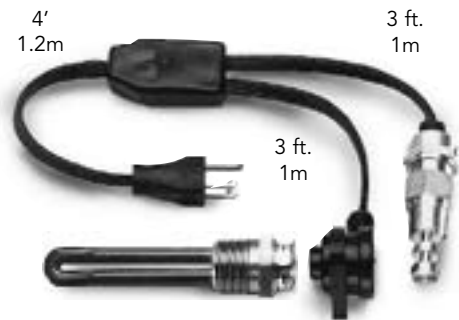


Heater shown for illustration purposes only




Flush Mount Kits for In-block Heaters

Model Number 120 Volt	Model Number 240 Volt	Cord Length	Plug Style	Kits include: 11PR- style cord (shown on page 48), recessed male receptacle and hinged flip cover.
IM6-1IN-FM	IM6-2IN-FM	6' (1.8m)	2	
IM11-1IN-FM	IM11-2IN-FM	11' (3.4m)	2	
IM16-1IN-FM	IM16-2IN-FM	16' (4.8m)	2	

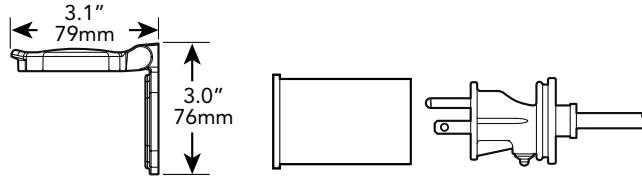

Flush Mount Kits for Thermosiphon Engine Heaters


Model Number	Volts	Amps	For Heater with Wattage of:	Kits include: Recessed male receptacle with 6' (1.8m) cord (no female connectors), hinged flip cover and female connector.
FM15120	120	15	500 to 1800	
FM15240	240	15	500 to 3000	
FM20120	120	20	2000 to 2250	

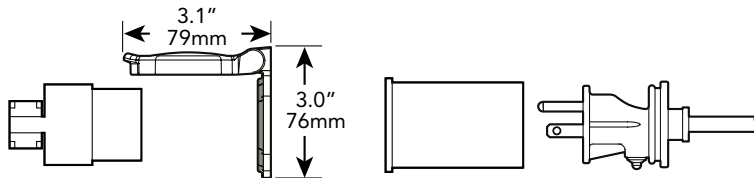

Other Accessories


Recessed Male Receptacle – with 6' (1.8m) cord (no female connectors)

Model Number	Volts	Amps
RM5-15	120	15
RM6-15	240	15
RM5-2Ø	120	20
RM6-2Ø	240	20

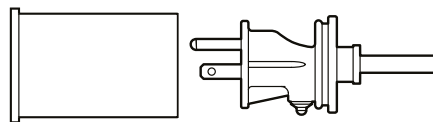

Female Connector - for extension cords


Model Number	Volts	Amps
FM1G2ØA	120	15/20
FM2G2ØA	240	15/20

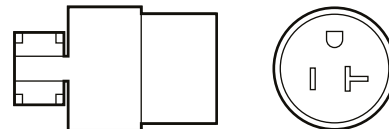

Hinged Flip Cover

Model Number	Description
*FC-KH	Black/HOTSTART Logo
FC-KH-C	Chrome/HOTSTART Logo

*Standard with kit

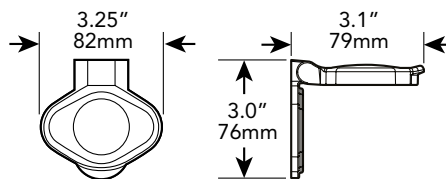

Plug Housing

Model Number
A-2223-PH

