


HOTSTART's OLE is a large capacity oil heating system for use in North American hazardous locations and is designed to maintain an engine or compressor's optimal oil viscosity for gas compressor or offshore equipment applications.

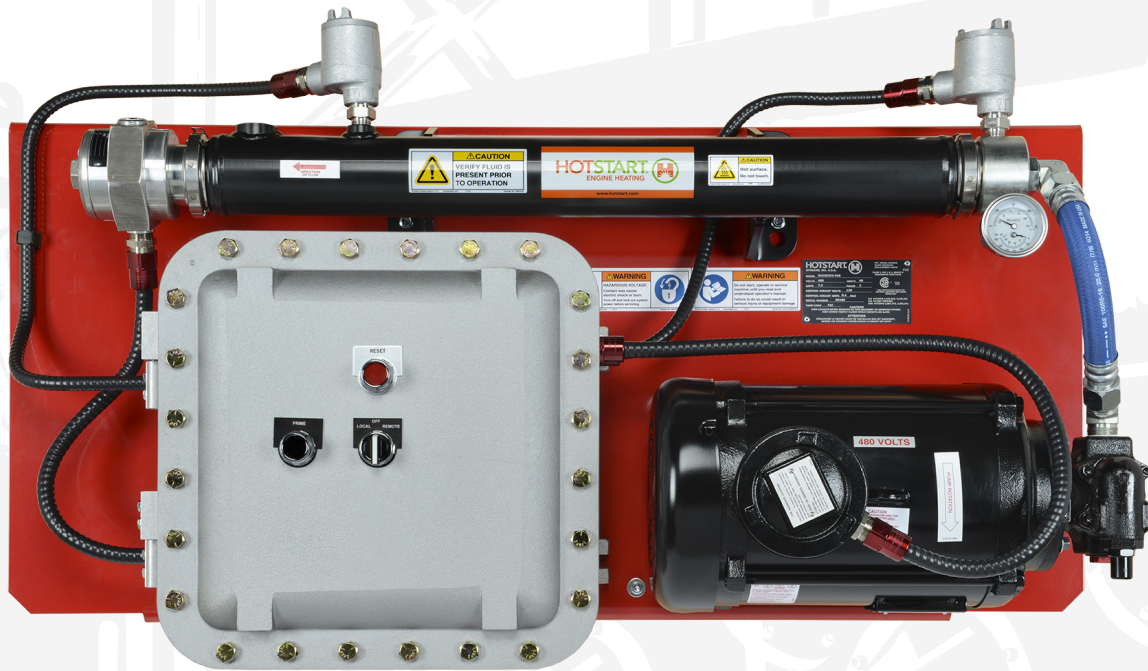

BENEFITS & FEATURES

ENGINE & COMPRESSOR AVAILABILITY

To improve equipment startability and availability, the OLE continuously circulates heated oil throughout the oil sump or lubrication system, maintaining a uniform and consistent temperature to ensure oil viscosity is at optimal levels for engine or compressor protection.

COMPLETE PACKAGED DESIGN

Designed as a user-friendly, pre-packaged system, the OLE includes all necessary components. The OLE's remote automatic function and customer interface connections enable it to be easily integrated into any control system.

REDUCED MAINTENANCE


Continuous lubrication of the compressor frame, bearings and crossheads with heated oil minimizes wear and tear, reducing overall maintenance. The OLE delivers the required flow to achieve pressure permissives for startup, eliminating the need for a separate prelube pump, motor and controller.

PREVENTS CONDENSATION

In warmer, humid climates, temperature variation can cause condensation in the oil pan, contaminating the oil and compromising the oil's lubrication properties. By maintaining temperatures above the dew point, the OLE eliminates the risk of condensation forming during cool down periods.

Explosion Proof CSA Oil Heating System

OLE

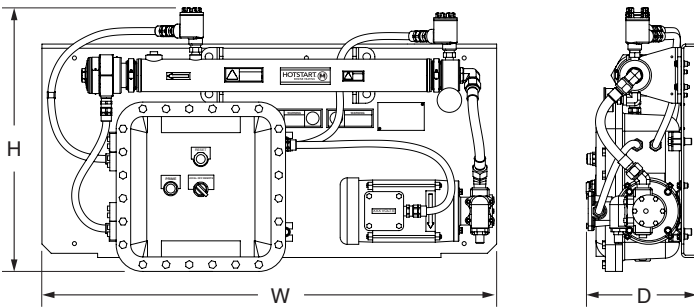

| Height (H) | Width (W) | Depth (D) | Weight |
|------------|-----------|-----------|---------|
| 23.0" | 49.0" | 12.0" | 300 lbs |
| 584 mm | 1245 mm | 305 mm | 136 kg |

| System | |
|-------------------------|-----------------------------------|
| Phase | three-phase (3 Ø) |
| Voltage (60Hz) | 208V 240V 440-480V 575-600V |
| Control Box Ingress | NEMA 4 |
| Motor Ingress | XPFC |
| Min./Max. Ambient Temp. | -4°F / 104°F (-20°C / 40°C) |
| Temp. Class (1 Ø) | T2C |
| Temp. Class (3 Ø) | T3C |
| Altitude Rating (Motor) | 3,300 ft (1,000 m) |
| Certification | Class 1, Div. 1, Group D CSA |


| Oil | |
|-------------------|---|
| Fluid | Lubrication oil |
| Fluid Capacity | 1 gal (3.8 L) |
| Heat Power | 2.5kW 6kW 9kW 12kW 18kW 24kW |
| Temp. Control | 32–212°F (0–100°C), adjustable |
| Control Set Point | 105°F (40°C), factory set |
| Temp. High-limit | 195°F (90°C) |
| Pump Power | 1–3 hp (0.75–2.25 kW) |
| Flow | 1.6–30 gpm (6.1 –113.6 L/min) |
| Inlet/Outlet | determined by flow rate / 1" NPT |
| Max. Pump Output | 75 psi (520 kPa), pressure relief limited |

Options shown represent typical tested or certified configurations. Additional options or configurations may be available. For assistance with your heating system application, contact HOTSTART at 281.600.3700 or oil.gas@hotstart.com.

Optional Lockout/Tagout Breaker Box for Hazardous Locations

Breaker Box

Optional breaker box provides a lockout/tagout disconnection point and overcurrent protection for Class I, Div 1 and 2, Group D classified heating systems.



| Height | Length | Width | Weight |
|--------|--------|--------|---------|
| 7.78" | 20.5" | 10.5" | 45 lbs |
| 230 mm | 152 mm | 161 mm | 20.4 kg |

MODEL INFORMATION

Proper heating system specification is dependent on multiple factors, including heated area dimensions, fluid volumes, ambient conditions, and other considerations. Additional heating system options not listed, including heat power, may be available. For assistance in selecting the heating system for your application, contact the HOTSTART Oil & Gas office at 281.600.3700 or oil.gas@hotstart.com.